



CAPACITY.
REV GROUP

Capacity Stock Truck Specs: Sabre 4x2 / DOT



Six ways Capacity gives you a distinct edge in your operation.

1. DURABILITY

Through exhaustive validation and testing to create *SabreFrame* and backing it with the industry-leading *SabreShield* structural warranty

2. RELIABILITY

Engineered into every aspect of Sabre's operation, from the automotive bundling and routing with an exclusive, sealed multiplex Body Control Module to our cab door with 96,000 cycles of testing

3. SERVICEABILITY

Access360 Serviceability with numerous engineered accommodations to ease service and maintenance, including numerous service checks that can be accessed from ground level

4. CUSTOMIZATION

The industry leader in choices and configurations


5. COMFORT AND SAFETY

Driver-optimized features such as *SabreTuned* Seat and Cab Suspension System that promote safe and productive operation

6. CUSTOMER CARE



Thorough and responsive attention to your needs through our exclusive customer promise: C3—the Capacity Customer Commitment

Capacity Stock Truck Specs: Sabre 4x2 / DOT

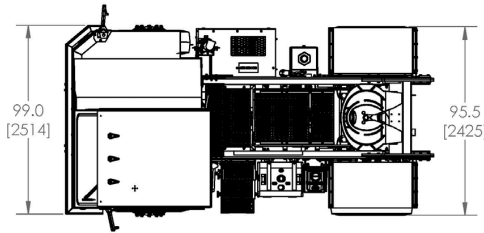

SABRE 4X2 / DOT

GCWR: 81,000 Wheelbase: 116"
Axle: 4x2 Cab: 66"

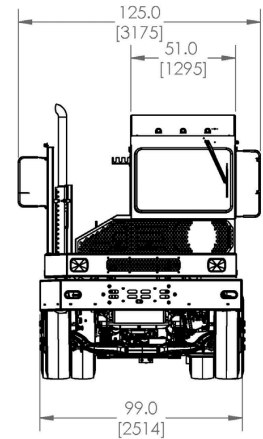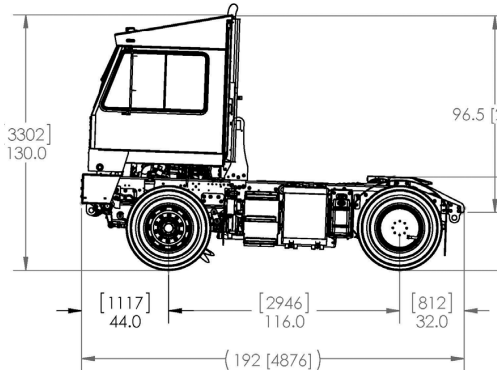

POWERTRAIN

Cummins ISB6.7L 200 Horsepower,
2400 RPM Turbocharged and
Charge Air Cooled
3-Way Shutdown Low Oil PSI,
High Coolant Temp, Low Coolant Level
Air Cleaner Filter
Air Intake Restriction Gauge -
Engine Mounted
Vertical Exhaust System
Exhaust Heat Shield
130 Amp Alternator
Denso Starter
Silicone Coolant Hoses
Allison RDS-3000
Meritor FF-961 12,000 lb. Capacity
Meritor RS24-160 7.17:1 Ratio
30,000 lb. Terminal Rating
Dunlop SP160 11K22.5 Rib Tires
Standard Valve Stems, TR-572 (0°)

CHASSIS

Group 31, 750 CCA Maintenance-Free
Batteries (2)
Sheppard M-100 Steering
Front Tire Flaps
Standard Capacity Bumper
50-Degree Taper Curbside Deck and Bumper
Frame Structure 116" 82" Between Cab &
Center 5th Wheel (In Up Position) and Cab
Front Tow Eye
Rear Tow Eye
Three Drain Pull Cords
50-Gallon Fuel Tank
Front Leaf Suspension 10L-9R
Rear Rigid Suspension
SAF Holland FW35 - 70,000 lb. Lift Capacity
5th Wheel Lift Height 16"
Backup Alarm
Recessed Rear/Stop Lights &
Back-Up Lights - LED

CAB

Five Top-of-Cab Clearance Lights - LED
Standard Mirrors
National 2000 Series Vinyl Mid-Back Driver's Seat
Seat Belt - Black Lap
Standard Steering Column
66" Cab
Keyed Ignition
Electric Intermittent Windshield Wipers
Volt Meter, Oil Pressure, Water Temperature,
Fuel Level, Air Pressure, Hour Meter,
Speedometer, Odometer
High Beam Headlight Indicator, Turn Signal-Hazard
Flasher Indicator, Low Fuel, Low Air & Low Engine
Oil Pressure Light & Buzzer
12' Coiled Trailer Air Hoses
Standard Red & Blue Glad Hand
45,000 BTU Heater/Defroster
Dome Light
Head Lights

OTHER STANDARD FEATURES

Standard Bumper Paint Black
Standard Cab Paint White
Standard Wheels Painted White
Standard Steps, Grates & Handrails
Paint "Safety Yellow"
Standard Platform Paint White
Standard Frame Paint Black

CAPACITY STOCK STANDARD OPTIONS

4-point Air Ride Cab	12V Auxiliary Power Socket	Platform-mounted - LED
AD-IP Air Dryer	Power Terminal Overhead	Worklight, One Rear-facing Driver
Cab Guards	Air Conditioning	Side Roof-mounted - LED
Coolant Recovery Bottle	Amber Strobe Light	8" Convex Mirrors
Flexible Rear Fenders	Windshield Washer	Translucent Sun Visor
Tire Flaps Behind Drive Axle, w/ Capacity Logo	Worklight, One Rear-facing Curb Side	

DOT Conspicuity Tape Daytime Running Lights License Plate Bracket Tire Flaps Behind Drive Axle Trailer Electric Light Cable Sun Visor

Rev. 06-2016



537 W. Anaheim St.
Long Beach, CA. 90813

PHONE: (562) 591-5665
EMAIL: sales@gohdi.com
www.GOHDI.com



CAPACITY.
REVGROUP